

(19)

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 081 353 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
07.03.2001 Bulletin 2001/10

(51) Int. Cl.⁷: F02B 37/24, F02D 33/02

(21) Application number: 00116265.0

(22) Date of filing: 09.08.2000

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

• Imai, Takeshi
Aki-gun, Hiroshima 730-8670 (JP)
• Shimizu, Ryou
Aki-gun, Hiroshima 730-8670 (JP)
• Shouji, Masatoshi
Aki-gun, Hiroshima 730-8670 (JP)

(30) Priority: 30.08.1999 JP 24371799

(71) Applicant:
Mazda Motor Corporation
Aki-gun, Hiroshima 730-8670 (JP)

(74) Representative:
Müller-Boré & Partner
Patentanwälte
Grafinger Strasse 2
81671 München (DE)


(72) Inventors:
• Matsue, Kouta
Aki-gun, Hiroshima 730-8670 (JP)

(54) Control system for supercharged engine

(57) A supercharged engine control system has a control unit (100) which establishes a target supercharging pressure according to engine operating conditions including an engine speed that is detected by a speed sensor (86) and an engine load that is detected as accelerator travel by an accelerator position sensor (87) and controls a supercharging pressure to reach the target supercharging pressure by feedback controlling a nozzle area of a variable nozzle (24) of the variable geometry supercharger (20) so as to cancel a pressure difference between the practical supercharging pres-

sure generated in an intake air passage that is detected by a pressure sensor (81) and the target supercharging pressure. The feedback control of supercharging pressure is restrained during a change from an operating condition of lower engine loads to an operating condition of higher engine loads so as thereby to prevent the supercharger (20) from overspeeding due to an increase in the pressure difference in excess at the beginning the change in operating condition.

FIG. 1

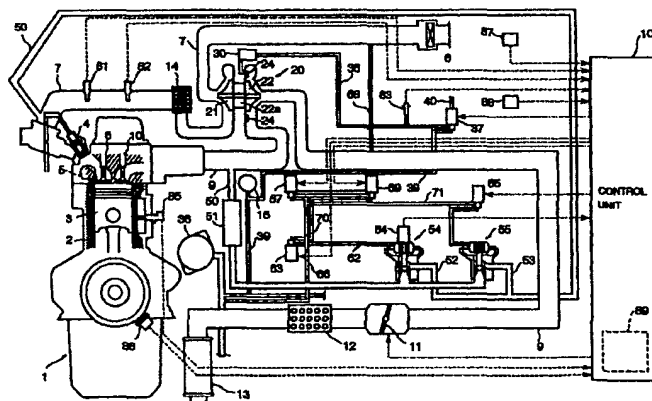

EP 1 081 353 A1